


# XFT195 LineMiss™ Quick User Guide

## CONTROL PANEL

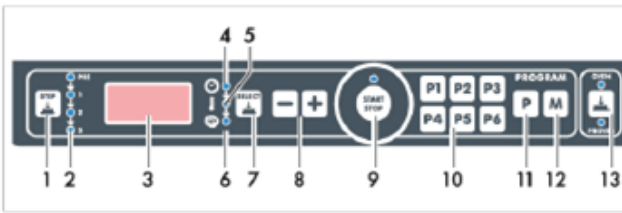

1. STEP Button
2. STEP LED
3. Display
4. Cooking Time LED
5. Cooking Temperature LED
6. Humidity LED
7. SELECT Button
8. + and – Buttons
9. START/STOP Cooking
10. P1 – P6 easy access saved programs
11. Access to saved programs
12. Saves set program
13. Switches from oven to prover

## MANUAL USE

### 1 PREHEATING:

Press STEP and then + or -  
To set the desired temperature.




### 5 SET HUMIDITY:

Press SELECT to light the humidity LED.  
Press + or – to set humidity:  
OFF for no steam or 20%, 40%, 60%,  
80% or 100% steam.




### 2 SELECT STEP 1:

Press the STEP button.

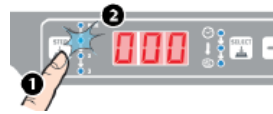

### 6 SET AIRFLOW SPEED:

Press SELECT until SP1 or SP2 show.  
Press + or – to select speed:  
SP1 = 1000 rpm no inversion  
SP2 = 2700 rpm with inversion

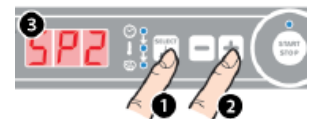

### 3 SET COOKING TIME:

Check the time LED is on.  
Press + or – to set time or  
press – to reach INF mode.



### 7 ADDING EXTRA STEPS:

If needed, add another cooking step.  
Press STEP and repeat the above  
process.




### 4 SET COOKING TEMPERATURE:

Press SELECT to light the temp. LED  
Press + or – to set temperature.



### 8 START COOKING:

Press START/STOP.

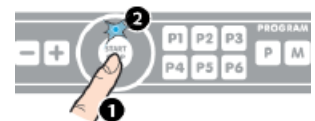


Once cooking has finished, you can  
press + if you want to repeat the  
same process.

## RECALLING AND STARTING A SAVED PROGRAM

For Programs P1 – P6 select  
the desired Program.

Press START/STOP to launch  
the program.

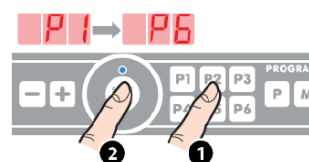

For Programs P7 – P99 press

**P** and then **+**  
to reach the program.  
Press START/STOP.

